



FLASHING AND PARAPET.
BY OTHERS

BLOCKS CUT IN THE HIGH
PORTION, PROVIDE SMOOTH
BLOCKS TO FACILITATE THE
INSTALLATION OF THE
FLASHING.

VENTS, AT ALL BLOCKS

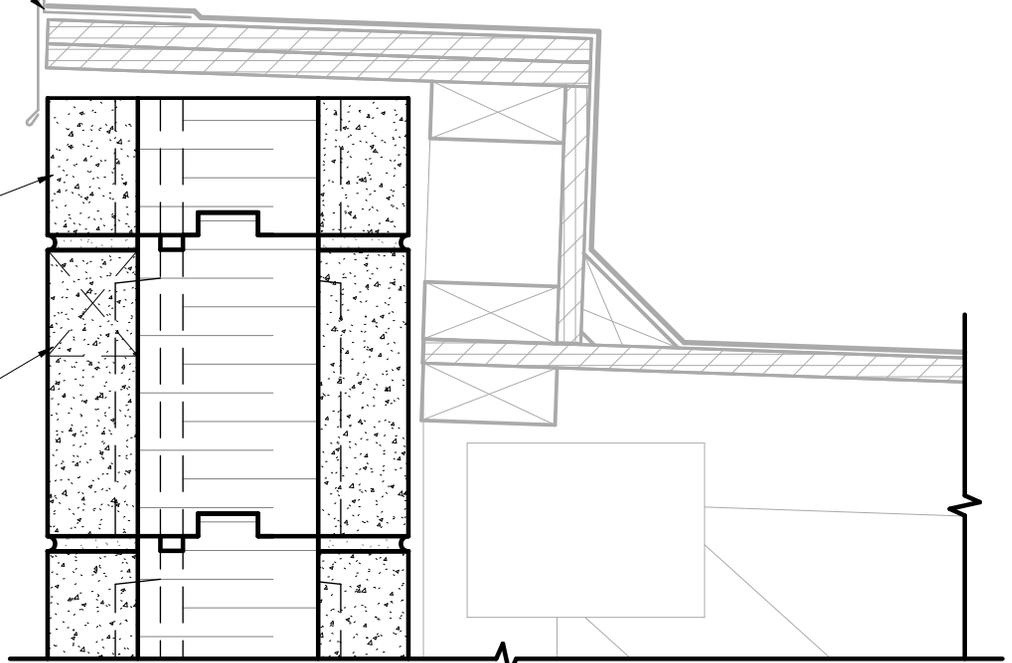

TIE BRACKET, FOR WIND
LOADS SUPPORT AND
LATERAL STABILITY IN SEISMIC
CONDITIONS

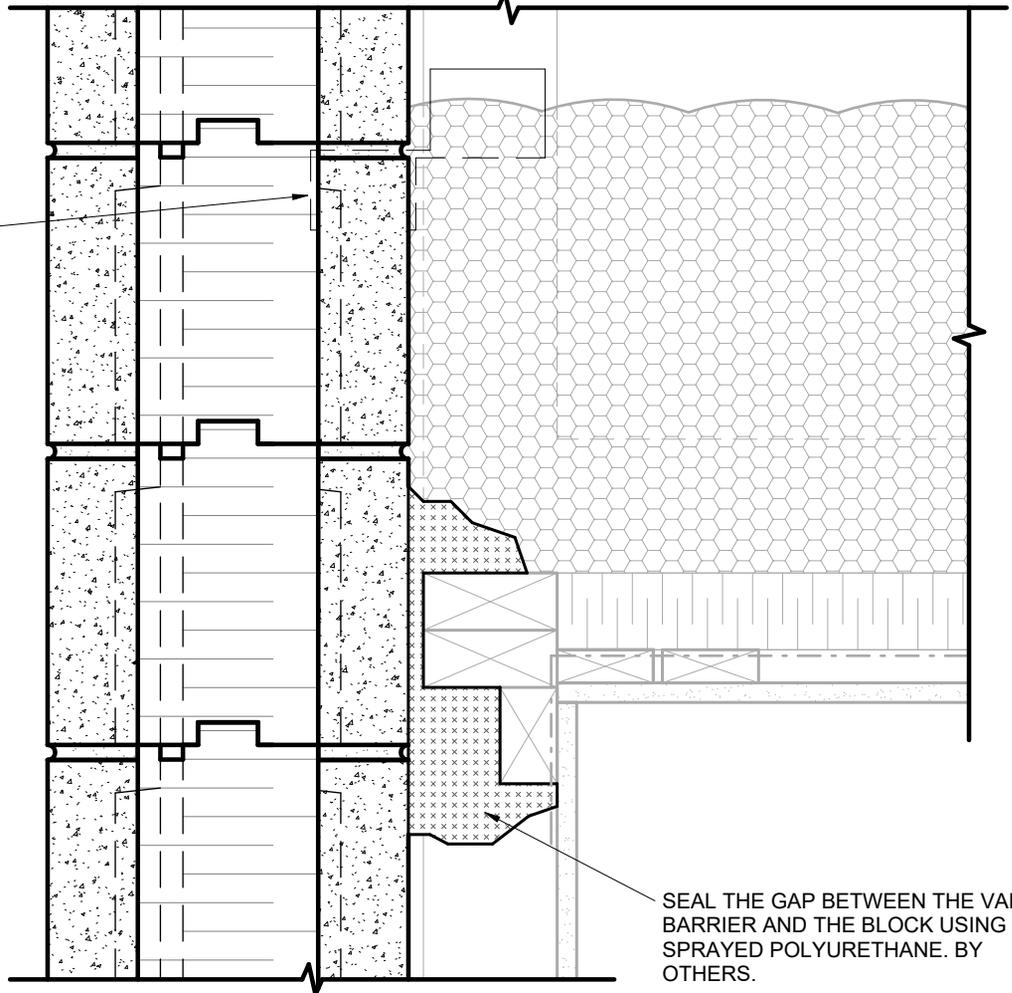

SEAL THE GAP BETWEEN THE VAPOR
BARRIER AND THE BLOCK USING
SPRAYED POLYURETHANE. BY
OTHERS.